

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/045995 A1**

- (51) International Patent Classification<sup>7</sup>: **B65G 23/08**, F16F 15/04, H02K 5/24
- (21) International Application Number: PCT/EP2003/012704
- (22) International Filing Date: 13 November 2003 (13.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PA 2002 01761 15 November 2002 (15.11.2002) DK
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **HVIDBERG, Jens** [DK/DK]; Bredegårdsallé 15, DK-6592 Hvidovre (DK).
- (74) Agent: **RUTZETZKI, Andreas**; Müller-Boré & Partner, Grafinger Strasse 2, 81671 München (DE).
- (81) Designated States (national): BR, CA, US.
- (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant (for all designated States except US): **INTER-ROLL (SCHWEIZ) AG** [CH/CH]; Zona Industriale, CH-6592 San Antonio (CH).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DRUM DRIVE WITH DAMPING DEVICE FOR DAMPING VIBRATIONS

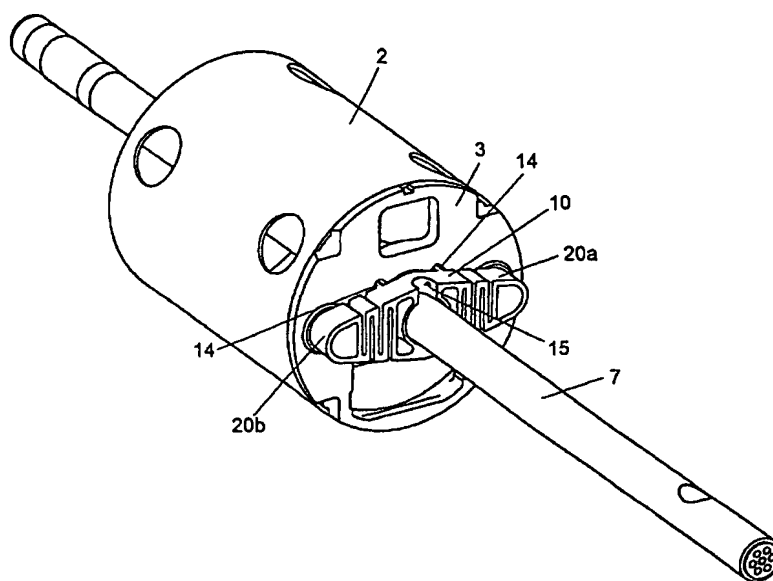

(57) Abstract: The invention relates to a drum drive that delimits an interior space intended for receiving an electromotor for producing a rotating movement of the drum. The electromotor comprises a stator, shell and stator cap. The stator is turnably journaled about the shaft (7), wherein the drive comprises at least one damping device (10) connected to the shaft (7) and to the stator, and extending radially from the shaft in a plane that is essentially at right angles thereto; and wherein the damping device (10) is configured for absorbing forces that strive to rotate the stator about the shaft.

WO 2004/045995 A1